



TOP VIEW

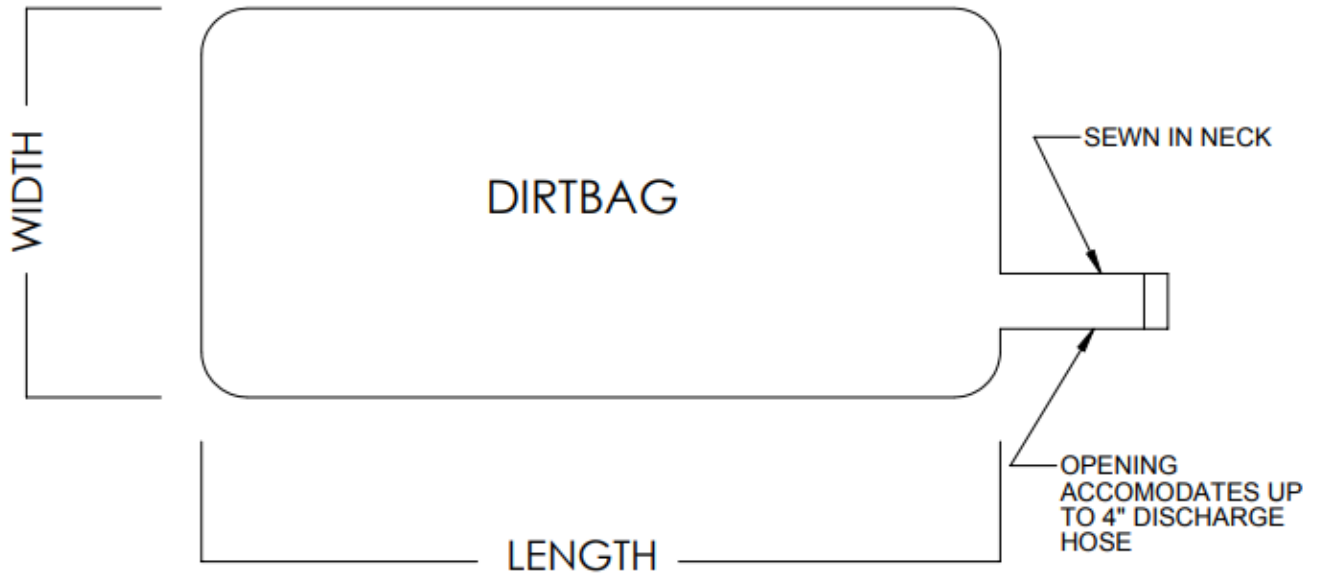

NOTES:

- 1) DIRTBAG TO BE PLACED ON AGGREGATE OR STRAW
- 2) SEAMS MUST BE HIGH STRENGTH DOUBLE STITCHED "J" SEAMS
- 3) SEAM MUST BE TESTED UNDER ASTM D-4884. ACF TEST RESULTS AVAILABLE UPON REQUEST

CROSS SECTION

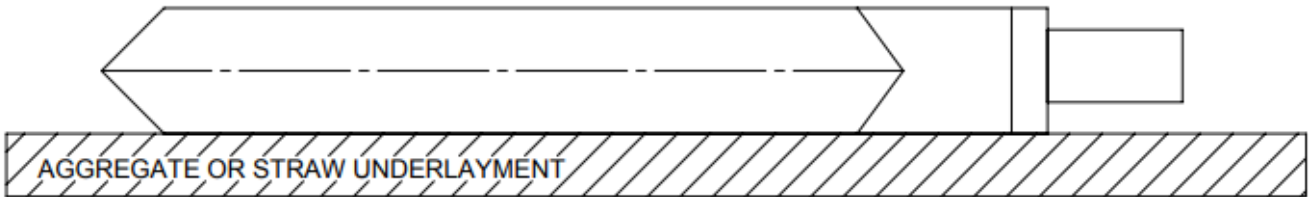

ACF DB55 PROPERTIES

PROPERTY	TEST METHOD	MARV
TENSILE STRENGTH	ASTM D-4632	205 LBS
ELONGATION	ASTM D-4632	50%
TRAPEZOID TEAR	ASTM D-4533	80 LBS
CBR PUNCTURE	ASTM D-6241	500 LBS
AOS	ASTM D-4751	80 SIEVE
PERMITTIVITY	ASTM D-4491	1.4 SEC -1
FLOW RATE	ASTM D-4491	90 GPM/FT ²
UV RESISTANCE	ASTM D-4355	70%

FERGUSON
WATERWORKS

CORPORATE OFFICE
2831 CARDWELL RD
RICHMOND, VA 23234
INFOGEO@FERGUSON.COM
WWW.FERGUSONGSS.COM

ACF DB55 DIRTBAG

FOR ADDITIONAL INFORMATION PLEASE
CONTACT FERGUSON SALES
INFOGEO@FERGUSON.COM OR VISIT
WWW.FERGUSONGSS.COM