


STRAP TO EXTEND PAST CORNER OF BAG INTO 6" LOOP (TYP. PER 4)

TOP VIEW


LIFT STRAP FOR REINFORCEMENT

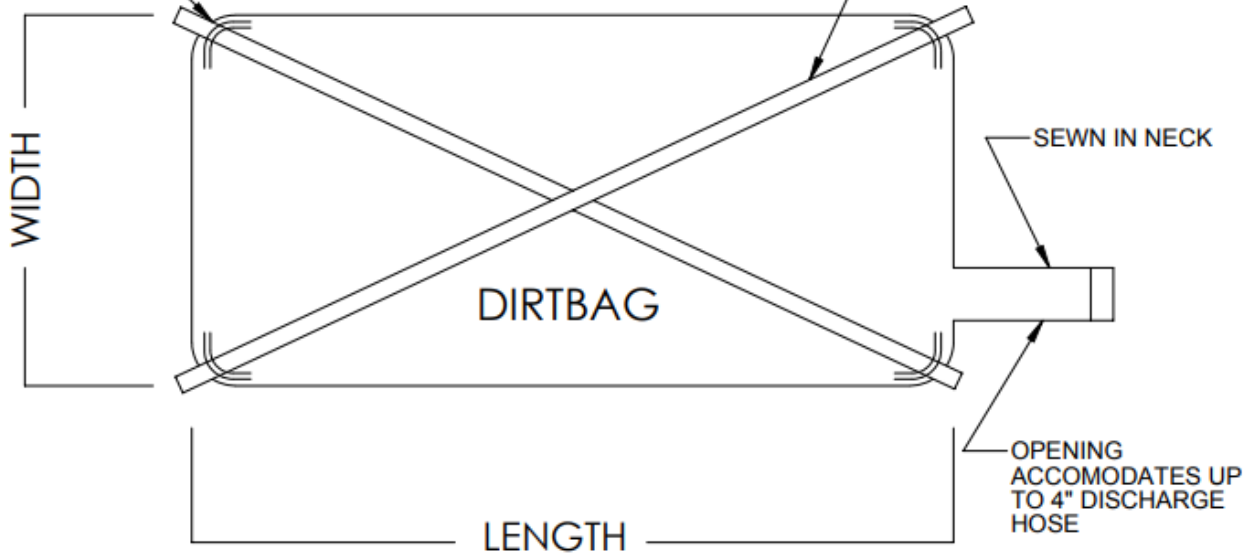

NOTES:

- 1) DIRTBAG TO BE PLACED ON AGGREGATE OR STRAW
- 2) SEAMS MUST BE HIGH STRENGTH DOUBLE STITCHED "J" SEAMS
- 3) SEAM MUST BE TESTED UNDER ASTM D-4884. ACF TEST RESULTS AVAILABLE UPON REQUEST

CROSS SECTION

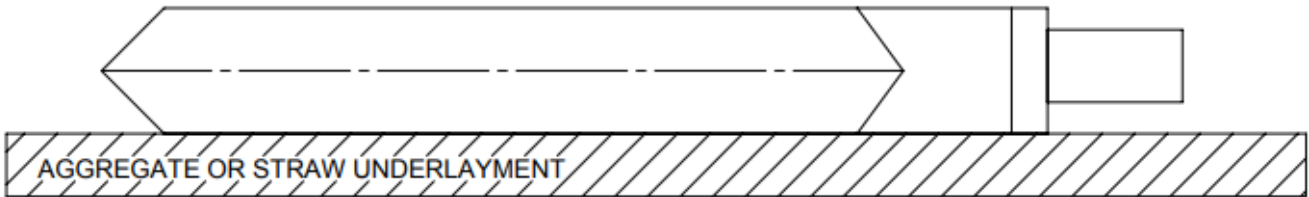

ACF DB55 PROPERTIES

PROPERTY	TEST METHOD	MARV
TENSILE STRENGTH	ASTM D-4632	205 LBS
ELONGATION	ASTM D-4632	50%
TRAPEZOID TEAR	ASTM D-4533	80 LBS
CBR PUNCTURE	ASTM D-6241	500 LBS
AOS	ASTM D-4751	80 SIEVE
PERMITTIVITY	ASTM D-4491	1.4 SEC -1
FLOW RATE	ASTM D-4491	90 GPM/FT2
UV RESISTANCE	ASTM D-4355	70%



CORPORATE OFFICE
 2831 CARDWELL RD
 RICHMOND, VA 23234
 INFOGEO@FERGUSON.COM
 WWW.FERGUSONGSS.COM

ACF DIRTBAG W/LIFT STRAPS

FOR ADDITIONAL INFORMATION PLEASE
 CONTACT FERGUSON SALES
 INFOGEO@FERGUSON.COM OR VISIT
 WWW.FERGUSONGSS.COM