


ATTACHING TRASH GUARD PLUS® TO ROUND BASIN WALL

1. ATTACH PIANO HINGE TO TRASH GUARD PLUS®

Secure piano hinges to rear of Trash Guard Plus® with 3 bolts and 3 nuts as shown. .

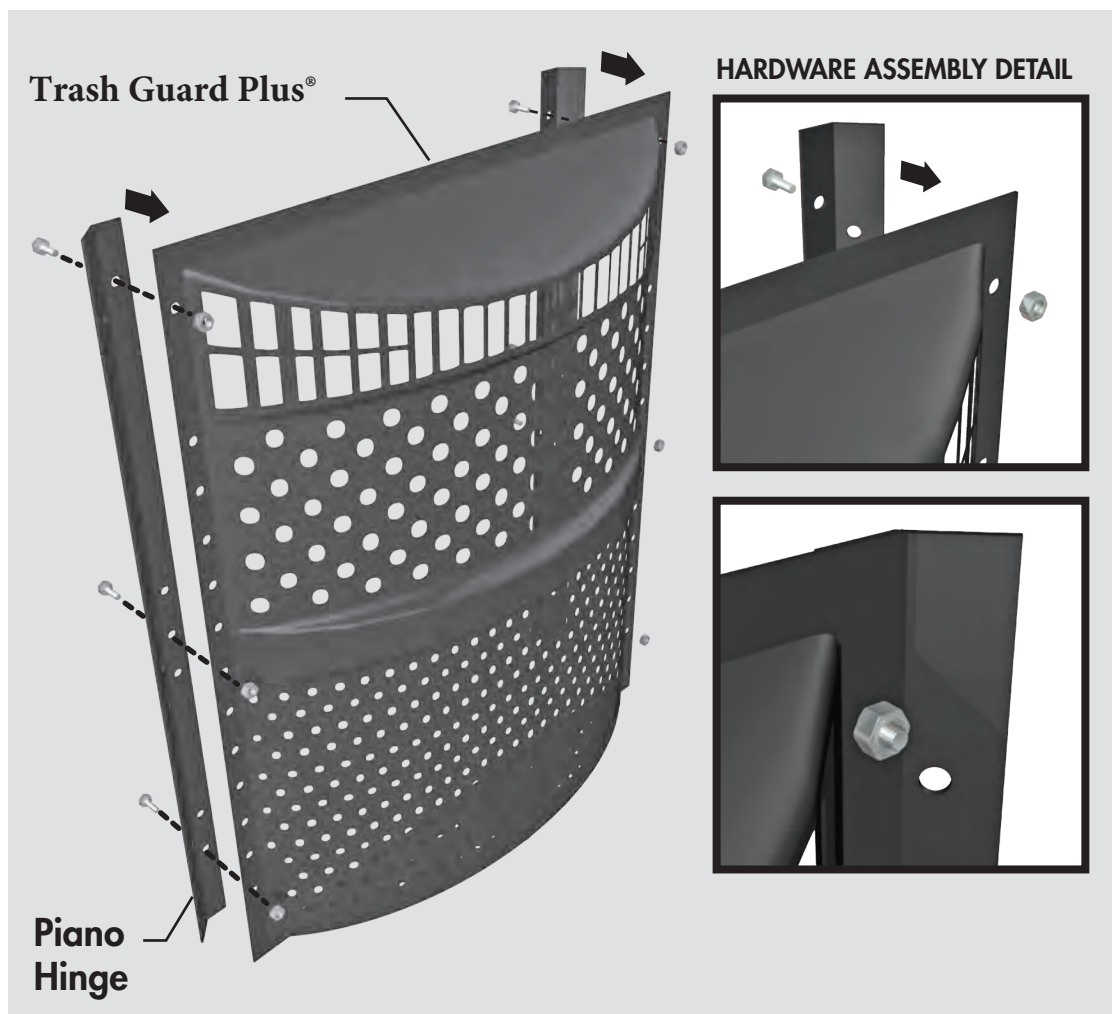


2. ATTACH TRASH GUARD PLUS® TO BASIN WALL

Drill 2 inch deep holes into Basin Wall.

Insert plastic anchors in pre-drilled holes

Secure to wall with 6 screws and washers


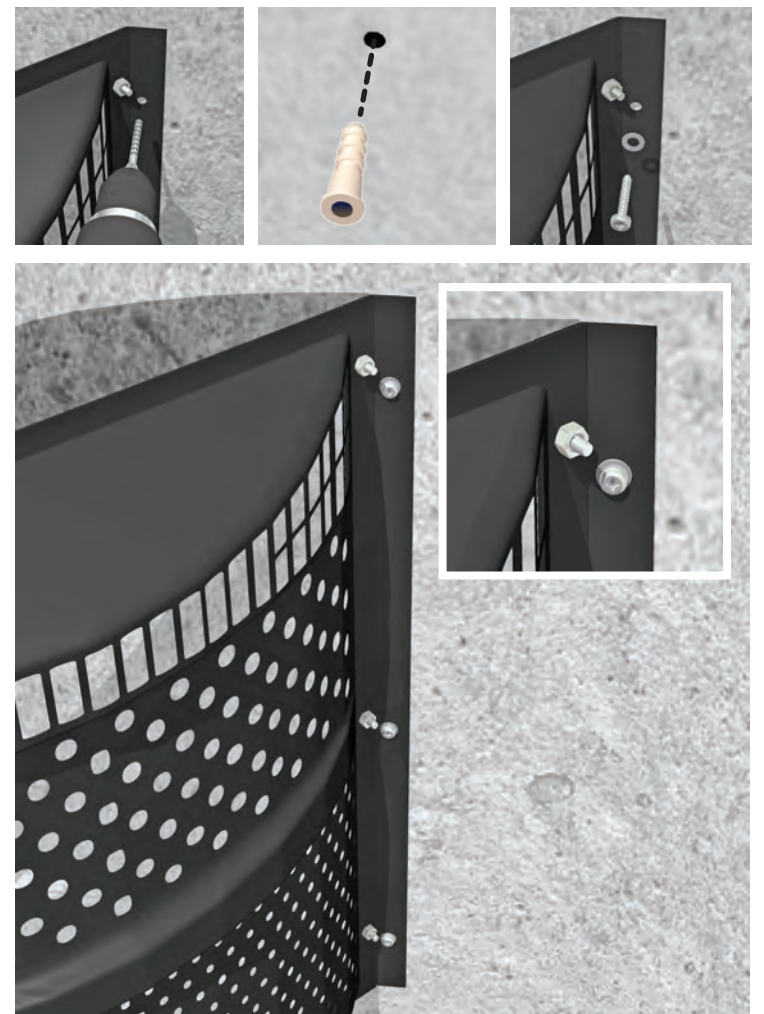


3. ATTACH CAP ROUND PANEL TO TRASH GUARD PLUS®

Place two spacers on top of Trash Guard Plus® top. Place **Cap Round Cover** over trash guard as shown below. Adjust spacers to align with slots in **Cap Round Cover** as needed. With washers attached to screws, slide screws through slots in **Cap Round Cover** and through holes in spacer. Torque screws to penetrate surface of Trash Guard Plus® top.

Adjust **Cap Round Cover** as needed to fit flush with curved wall of **Basin Wall**.

When **Cap Round Cover** is flush against wall, tighten screws to hold in place. **Cap Round Cover** should be parallel to top of Trash Guard Plus® and flush against **Basin Wall** as shown in **Figure A** below.


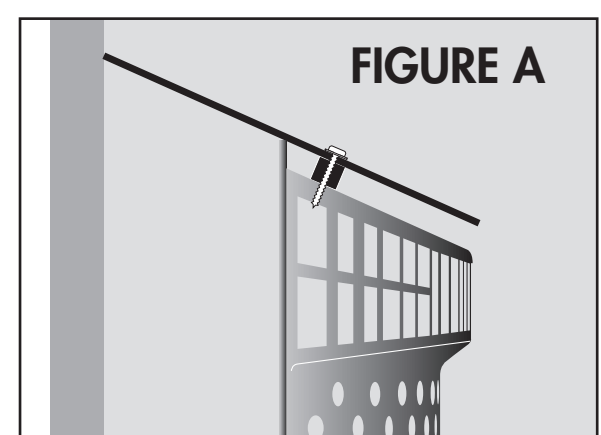
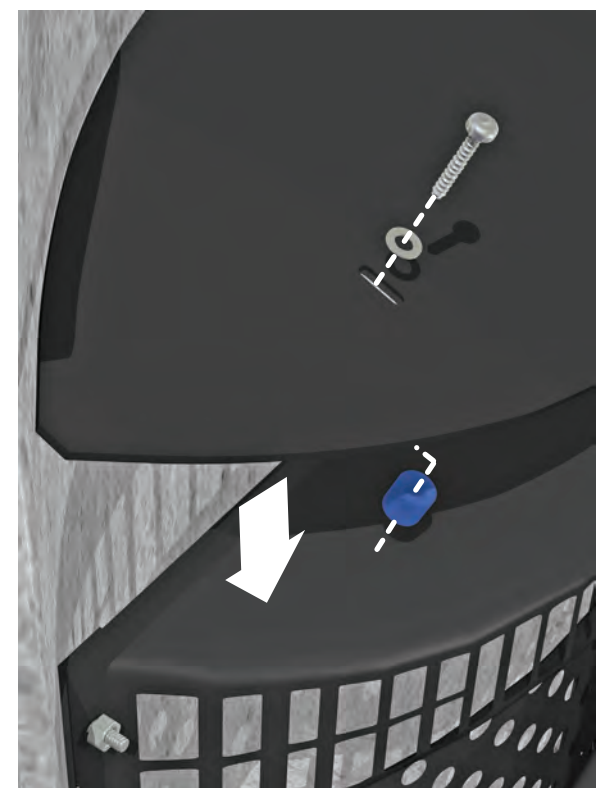


ATTACHING SIDE MESH PANELS TO WALL AND TRASH GUARD PLUS® IN ROUND BASIN

Place two side mesh panels on wall to mark and drill 2 in deep wall assembly holes.

Insert 6 plastic anchors into drilled holes and secure mesh to wall as shown with 6 washers and 6 screws. (3 each per side mesh panels)






Position Trash Guard Plus in place and slide steel rods through holes in Trash Guard Plus® to mark assembly position on wall with chalk as shown.

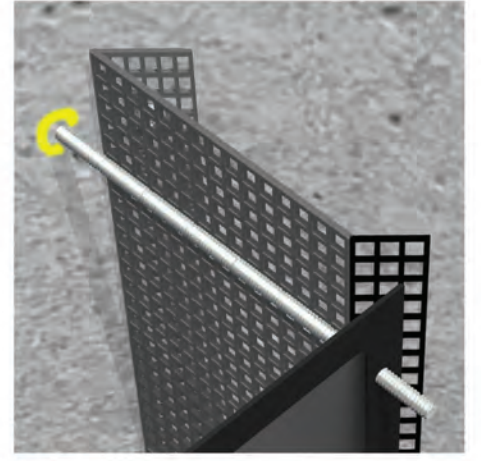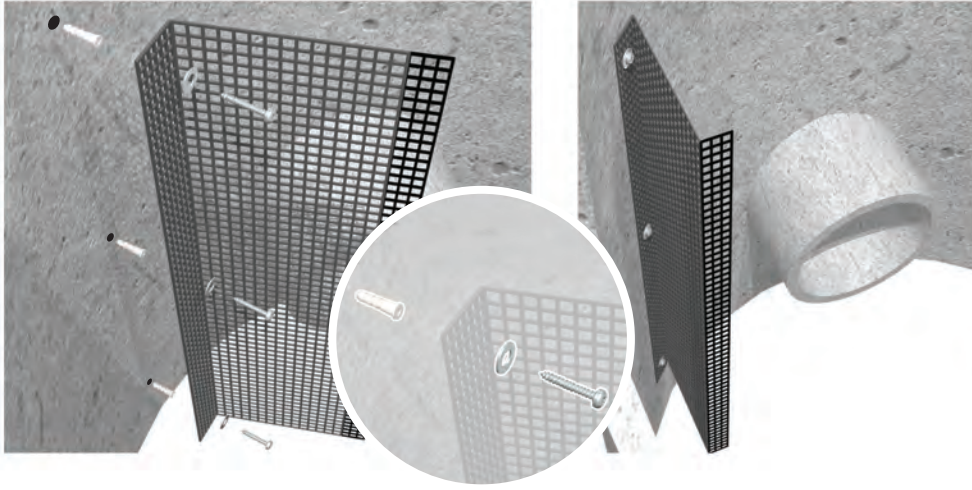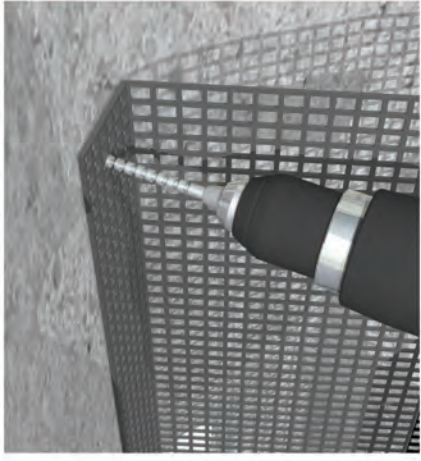

Drill 1/2 inch deep pilot holes into wall at marked areas perpendicular to wall.

Rotate drill as shown to run perpendicular to Trash Guard Plus and drill 2 inch deep holes into wall for rod assembly hardware.




Insert metal anchors into wall.

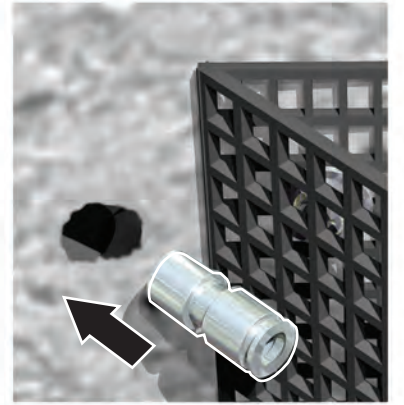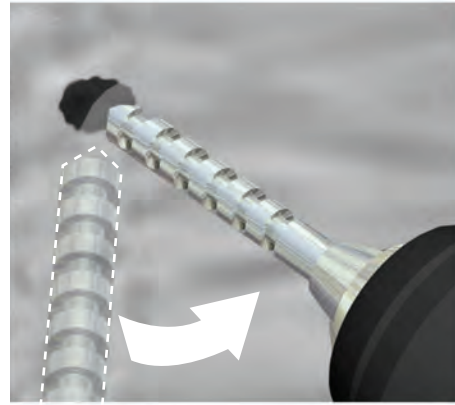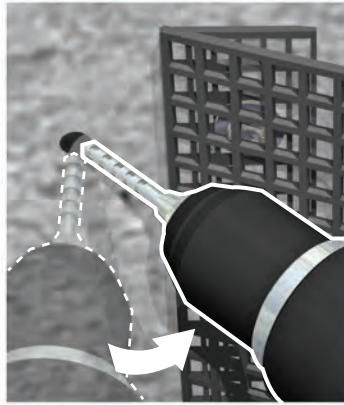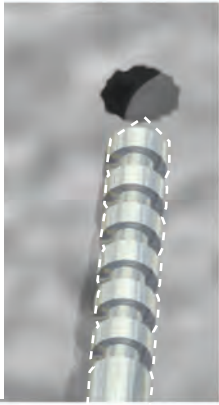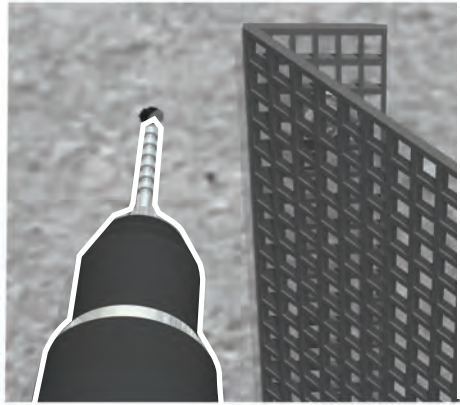

Thread rods into anchors and attach 2 washers and 2 nuts onto rod as shown below.

Adjust hardware as shown below to tighten rod to wall and allow placement of Trash Guard Plus to rod.



Slide Trash Guard Plus into place on rods.

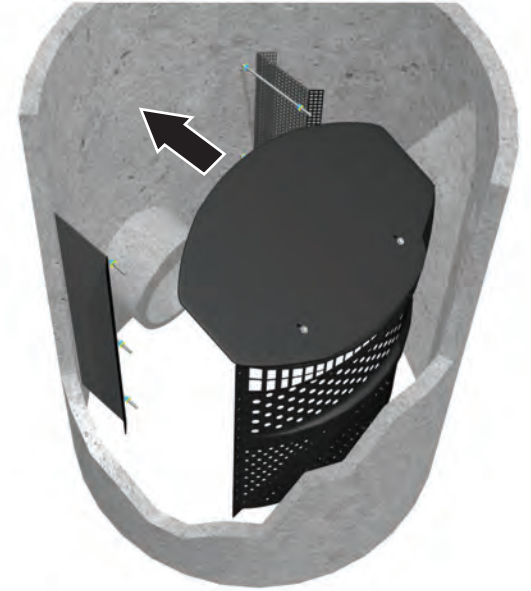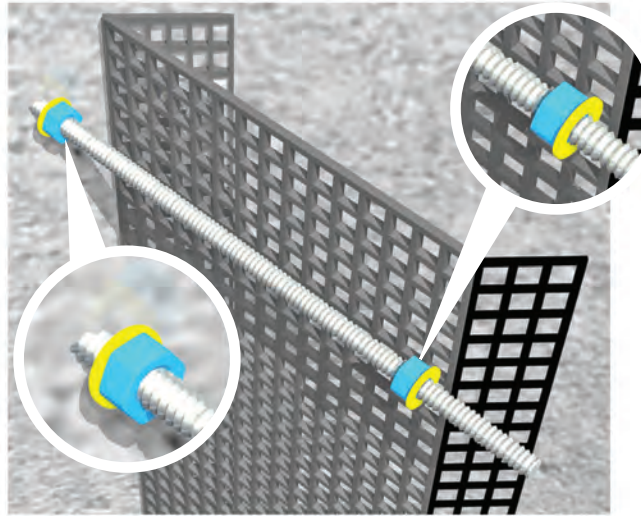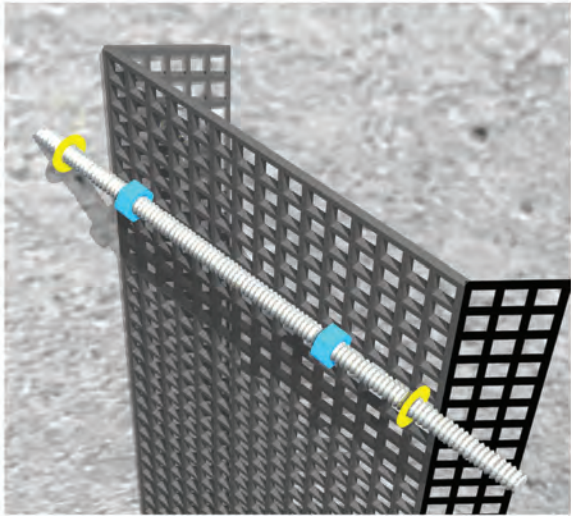

With Trash Guard Plus in place, attach side mesh panels to side of Trash Guard Plus with 4 tie wraps and 6 washers and 6 nuts as shown.



TIE WRAPS

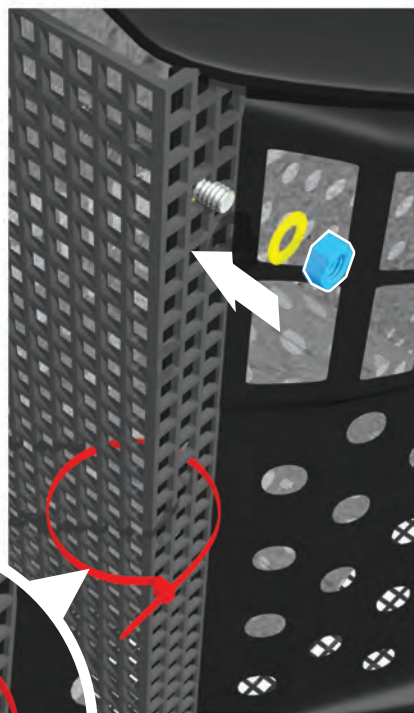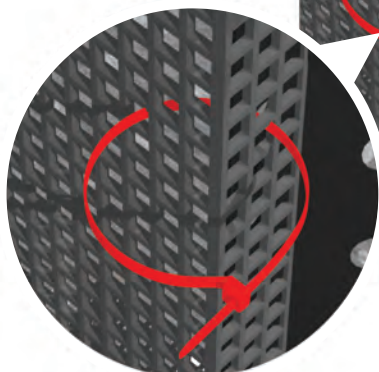

TIE WRAPS
WASHERS
AND NUTS

