


SPECIFICATIONS	
SURFACE INFILTRATION RATE	1,000 IN/HR AVG.
OPEN JOINT WIDTH	0.25 IN
JOINT FILLER BETWEEN BLOCKS *	NONE ALLOWED

** RECOMMENDED STONE BASE DEPTHS	
DEPTHS LISTED BELOW ARE SUBJECT TO CBR TESTS AND THE DESIGN ENGINEER'S SUBGRADE SUPPORT CALCULATIONS.	
PEDESTRIAN TRAFFIC	6"-8" MIN.
PASSENGER VEHICLE TRAFFIC	12" MIN.
INDUSTRIAL TRAFFIC	18" MIN.



SECTION A-A

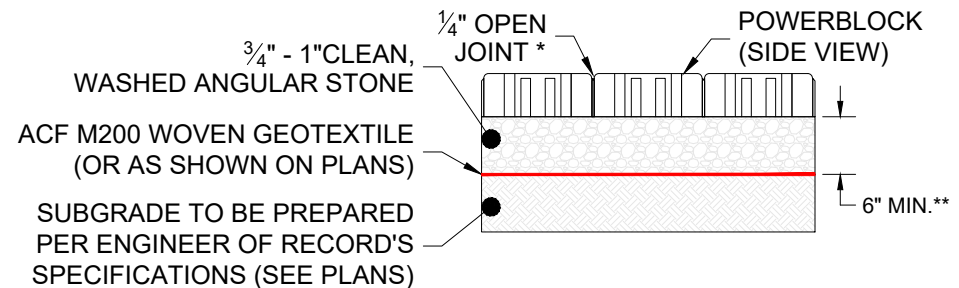

FOR ADDITIONAL INFORMATION PLEASE CONTACT:
FERGUSON WATERWORKS, 1-800-448-3636, www.ferguson.com

NOT TO SCALE

11/06/2022

POWERBLOCK STANDARD DETAIL AND SECTION