


**Aer-Flo Inc.**  
4455 – 18<sup>th</sup> Street East  
Bradenton, FL 34203

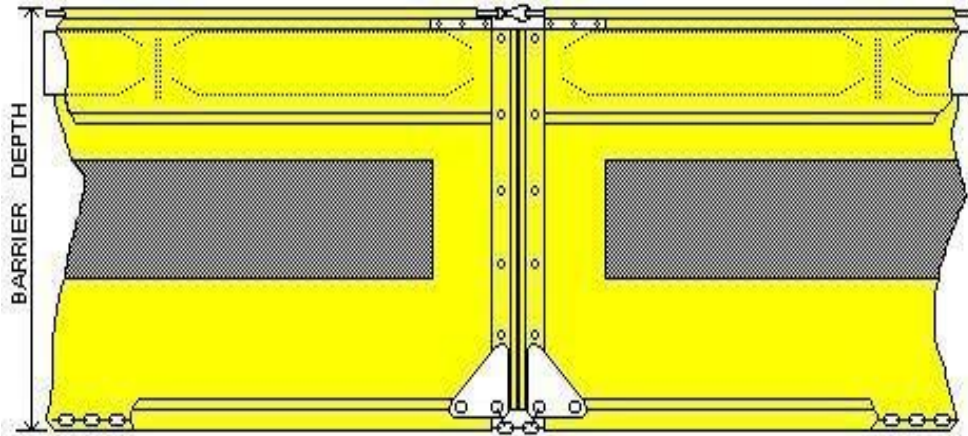

***Tough Guy®* Floating Turbidity Barrier  
Type3.DOT**

**Specifications (ST: 8/12)**

**Main body fabric- 18oz nominal PVC covered polyester**

**Geotextile - woven filter fabric inserted into skirt of no less than 20% of skirt area**

**All main body seams are heat sealed. All geotextile seams are sewn double needle, black thread**

**5/8 in. poly rope reinforced vertical edges**

**#5 brass grommets on vertical edges & every 10' across bottom hem on barriers over 10' deep**

**5/16 in. galvanized/coated steel 7x19 load cable in top, 9800 lb. break strength**

**5/16 in. galvanized chain ballast in bottom**

**Aluminum stress plates at cable and chain terminations**

**EPS flotation, (8 in. x 8 in. standard), 26.7 lb./ft. buoyancy in fresh water, 28.4 lb./ft in saltwater.**

**Vinyl fabric is UV Resistant (Weather-O-Meter) Not Excessive fading after 300 hr.**