


### ACF SILTSACK NW PROPERTIES

PROPERTY	TEST METHOD	MARV
TENSILE STRENGTH	ASTM D-4632	205 LBS
ELONGATION	ASTM D-4632	50%
TRAPEZOID TEAR	ASTM D-4533	80 LBS
CBR PUNCTURE	ASTM D-6241	500 LBS
AOS	ASTM D-4751	80 SIEVE
PERMITTIVITY	ASTM D-4491	1.4 SEC -1
FLOW RATE	ASTM D-4491	90 GPM/FT2
UV RESISTANCE	ASTM D-4355	70%
SEAM BREAKING STRENGTH	ASTM D4632 (MOD FOR SEAM STRENGTH)	160 LBS
SEDIMENT REMOVAL	ASTM D7701	EXCEEDS 80% REMOVAL EFFICIENCY

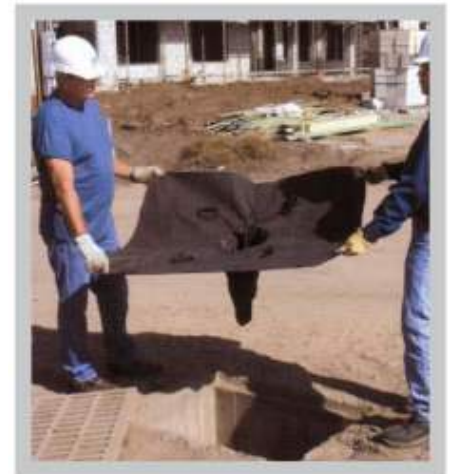

## ACF SILTSACK NW

**FERGUSON**  
WATERWORKS

CORPORATE OFFICE  
2831 CARDWELL RD  
RICHMOND, VA 23234  
INFOGEO@FERGUSON.COM  
WWW.FERGUSONGSS.COM

FOR ADDITIONAL INFORMATION PLEASE  
CONTACT FERGUSON SALES  
INFOGEO@FERGUSON.COM OR VISIT  
WWW.FERGUSONGSS.COM